



FORTUNE MINERALS LIMITED

148 Fullarton Street, Suite 1508, London, Ontario, Canada N6A 5P3

Tel. 519-858-8188 ~ Fax. 519-858-8155

Mr. Greg Smith
Mackenzie Valley Land And Water Board
7th Floor – 4910 50th Avenue
PO Box 2130
Yellowknife, NT X1A 2P6
Tel. 867-669-0506
Fax. 867-873-6610

April 27, 2004

Mackenzie Valley Land
& Water Board

File

MAY - 5 2004

Application # MY2004C0021
Copied To PLM/SM/Reg

RE: Incomplete Application – Mineral Exploration – Meridian Lake

Dear Mr. Smith

Thank you for your letter dated April 22, 2004 outlining the inadequacies of our application for a new land use permit for the Slave 1 and Slave 2 claims located along the southern shoreline of the East Arm of Great Slave Lake. Included in this package is a copy of Fortune Minerals Oil and Hazardous Material Spill Contingency Plan, which includes the Material Safety Data Sheets for the various hazardous materials anticipated to be found on site. The plan is complete and will be put to use dependant on results of Phase 1 geological and geophysical examinations.

It is unclear, at this time, how many structures will be established at the proposed campsite. Initially, there will be a tent camp established with one to two, 4-person tents and a kitchen tent to accommodate a small crew of geologists +/- geophysicists, line-cutters etc. It will depend again on success achieved in the preliminary phase of exploration whether a larger camp is needed if and when a drill crew is brought on site.

An archaeological search by the Prince of Wales Northern Heritage Centre reported finding no archaeological sites within 150 metres of the area of interest. Please find attached to this letter, an email message dated April 27, 2004 stating their results.

A map (1:5000) of existing camp facilities cannot be presented at this time since a camp has not yet been established on site. The enclosed map labeled Figure 3. can be attached to the Land Use Application, which displays the location of a pre-existing camp and trails to the known surface showings.

Please contact me if there are any further requests or if it is found that the application for the Land Use Permit lacks any further information.

Thank you,

Derek Mulligan.
dmulligan@fortuneminerals.com

DerekMulligan

From: <Dana_Lampi@gov.nt.ca>
To: <dmulligan@fortuneminerals.com>
Sent: Tuesday, April 27, 2004 10:44 AM
Attach: BDY.TXT
Subject: NWT Archeological Sites Data
Hi Derek,

Thank you for your request for information. There are no known archaeological sites within 150m of your area of interest. However, please keep in mind that only a small fraction of the archaeological sites in the NWT have been located and recorded. If there are none recorded in your area of interest this likely means that the area remains unexplored for archaeological resources and that sensitive, unrecorded archaeological sites may exist.

Please let me know if you have any questions.

Dana

Dana Lampi, GIS Officer
Prince of Wales Northern Heritage Centre
Government of the Northwest Territories
P.O. Box 1320
Yellowknife, NT X1A 2L9

Phone: 867.920.8841
Fax: 867.873.0205
Email: dana_lampi@gov.nt.ca

Visit our web site at <http://www.pwnhc.ca>
Also visit <http://www.lessonsfromtheland.ca>

4/27/04

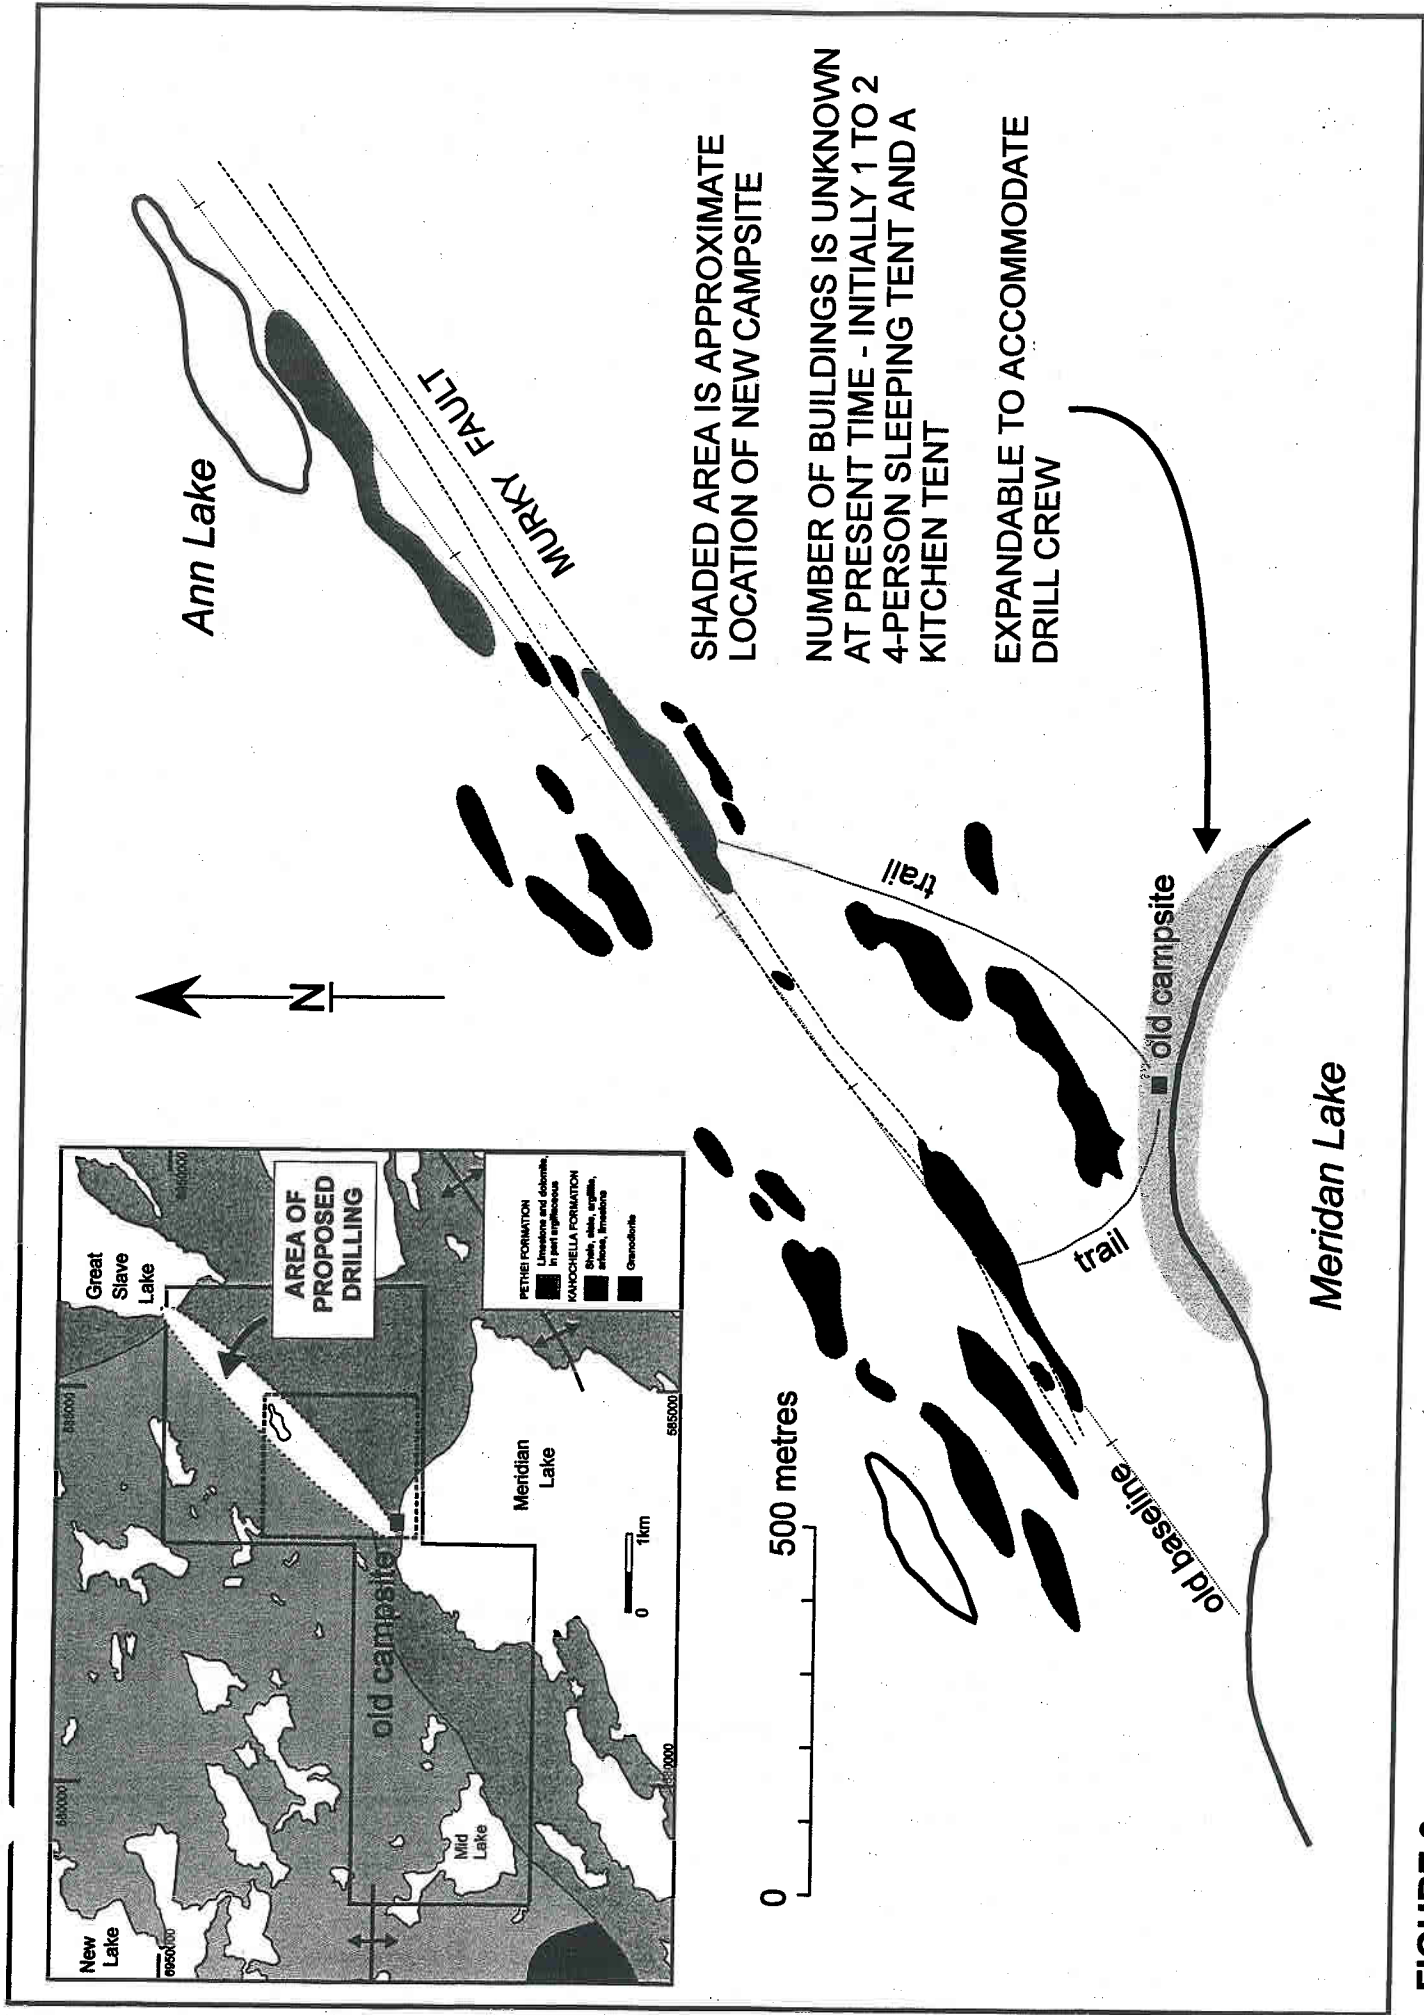


FIGURE 3.

MacKenzie Valley Land
& Water Board

File

MAY - 5 2004

Application # MV8004C0021

Copied To PLM/SM/Reg

**Fortune Minerals Limited
Oil and Hazardous Material
Spill Contingency Plan**

April 27, 2004

**Prepared By:
Fortune Minerals Limited
1508-148 Fullarton Street
London, ON N6A 5P3**

Fortune Minerals Limited
148 Fullarton Street, Suite 1508
London, ON
N6A 5P3
Tel: 519-858-8188 Fax: 519-858-8155

Oil and Hazardous Material Spill Contingency Plan

The Spill Contingency Plan applies to the Meridian Lake project of Fortune Minerals Limited located along the south shoreline of the East Arm of Great Slave Lake of the Northwest Territories. The main area of exploration is centered at approximately 62°38' north latitude, 109° 23' west longitude. Fortune Minerals Limited is submitting the Spill Contingency Plan in conjunction with the application for a new land use permit (MV2003C0021).

The following formal distribution has been made of this Plan:

Environmental Protection Services
Department of Resources, Wildlife
and Economic Development
Government of the Northwest Territories
PO Box 1320
Yellowknife, NT X1A 2L9

Mackenzie Valley Land and Water Board
7th Floor – 4910 50th Avenue
PO Box 2130
Yellowknife, NT X1A 2P6

Additional copies and updates of this Plan may be obtained by writing to the address at the top of this page.

Introduction

The purpose of the Hazardous Material Spill Contingency Plan is to provide a plan of action for every foreseeable spill event that may occur at the Meridian Lake exploration camp at the Slave 1 & 2 claims located along the south shoreline of the East Arm of Great Slave Lake. It defines the responsibilities of key response personnel and outlines the procedures for responding to spills in a way that will minimize potential health and safety hazards, environmental damage, and clean up costs. The Plan has been prepared to provide easy access to all the information needed in dealing with a possible spill.

The following pages display maps defining the exploration camp operated by Fortune Minerals Limited. The Meridian Lake camp is at the initial stages of exploration with no mining operations at the present time. Activities include; line cutting, geological mapping, geophysical surveying and minor camp construction. There is currently no drilling equipment on site although, contingent on results of phase 1 geological and


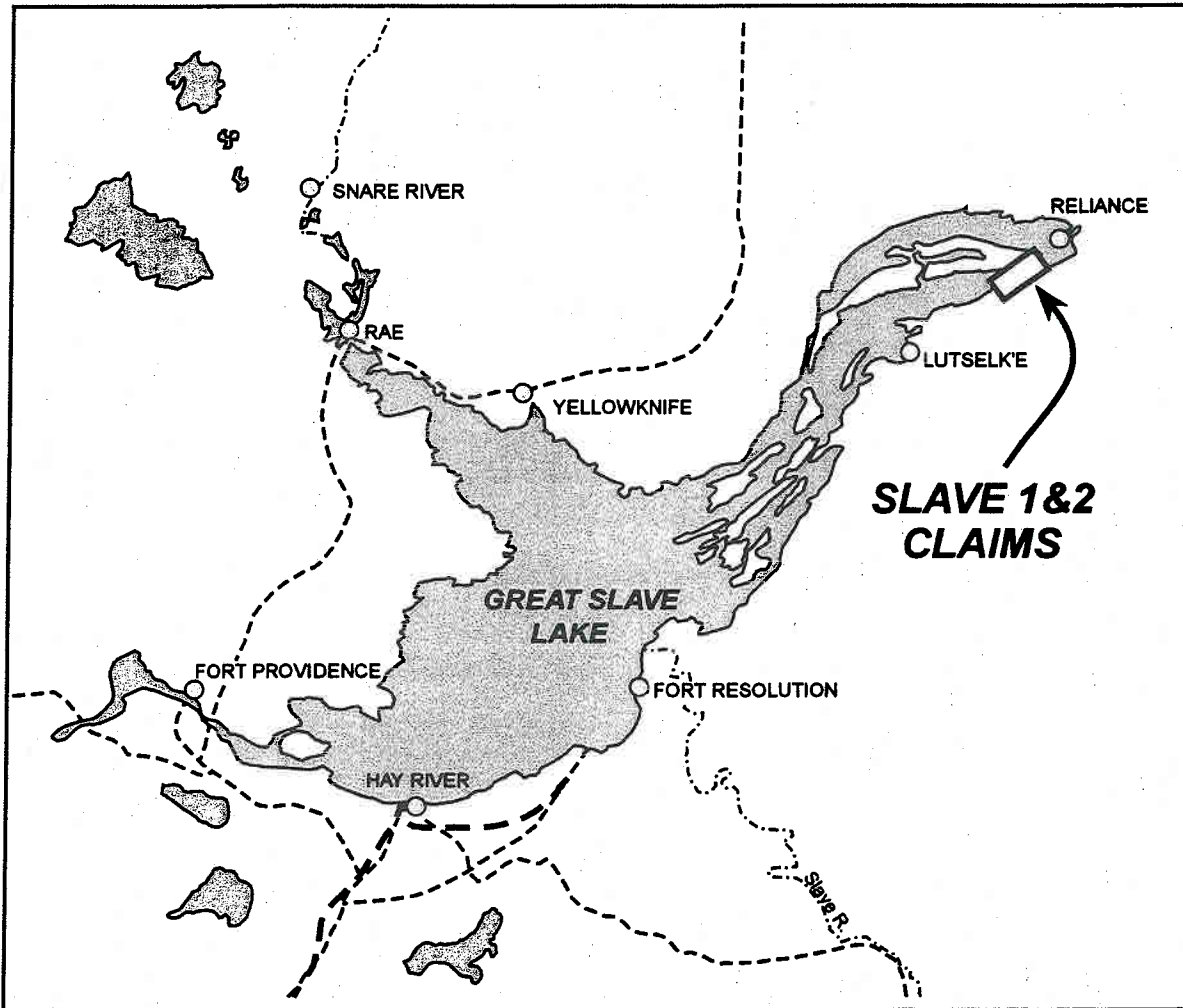


Figure 1. Location map of Slave 1 and Slave 2 claims

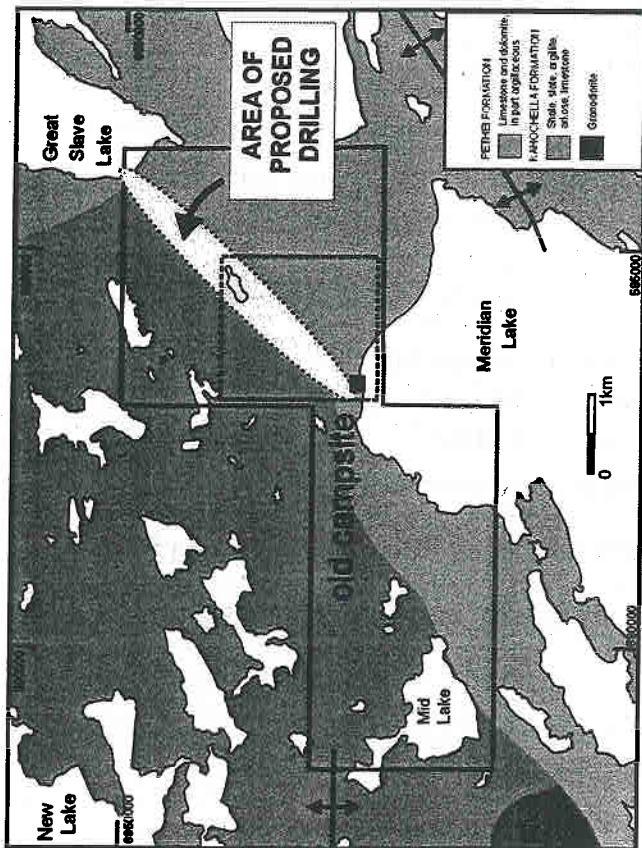

Ann Lake

MURKY FAULT

SHADED AREA IS APPROXIMATE
LOCATION OF NEW CAMPSITE

NUMBER OF BUILDINGS IS UNKNOWN
AT PRESENT TIME - INITIALLY 1 TO 2
4-PERSON SLEEPING TENT AND A
KITCHEN TENT

EXPANDABLE TO ACCOMMODATE
DRILL CREW

0 500 metres

trail

old baseline

old campsite

Meridian Lake

Figure 2. Site specific drawing of the proposed Meridian Lake camp showing location of old camp, trails and baseline.

geophysical studies, a buggy drill would be transported to the site. Hazardous materials being used at the camp would then include diesel fuel, Jet B fuel, regular unleaded gas and propane. The main fuel cache would likely be located close to the Meridian Lake camp on a flat area and at a safe distance from the shoreline of the lake. A separate fuel cache for diesel could be located closer to the main area of drilling, although it is unlikely. No camp or road construction has taken place at the present time. It is the Company's anticipation to use a buggy drill in order to avoid road construction and minimize the environmental impact using smaller trails and paths.

It is the policy of Fortune Minerals Limited to cleanup any spill or environmental degradation on lands the Company is exploring. As well, it is our Company policy to:

- comply with existing regulations;
- provide such protection of the environment as is technically feasible and economically practical;
- cooperate with other groups working on protection of the environment;
- anticipate future pollution control requirements and to make provision for them; and
- keep employees, government officials and the public informed.

Response Organization

Fortune Minerals Limited will be responsible and will maintain the required personnel with proper qualifications depending on the number of people in camp. The chief geologist in charge of operations will have a minimum of: Mine Health and Safety Act -Supervisor Certificates (Level 1) and a Standard-Safety Oriented First Aid Certificate. The camp will always maintain at least one person retaining the Advanced-Safety Oriented First Aid Certificate with CPR.

Initial Action

List of proper procedures for reacting to a spill of hazardous material and a suggested course of action of the first person at the scene who has detected a problem.

- a) Be alert and consider your safety first. If possible, identify the product spilled;
- b) Assess the hazards to persons in the vicinity of the spill;
- c) If possible, without further assistance, control danger to human life;
- d) Assess whether the spill can be readily stopped or brought under control;
- e) If safe to do so, and if possible, try to stop the flow of material;
- f) Gather information on the status of the situation;
- g) Report the spill without delay to the Spill Response Team and ensure that government is notified at the same time by the NWT 24 Hour Spill Report Line (867) 920-8130; and
- h) Resume any effective action to contain, clean up, or stop the flow of spilled material.

Reporting Procedure

All spills or potential spills of petroleum products or other hazardous materials must be reported to the 24 Hour Spill Report Line to ensure that an investigation may be undertaken by the appropriate government authority.

The following box outlines the procedure to be taken when reporting a spill to the appropriate authority.

SPILL REPORTING PROCEDURE

1. Fill out the 'Spill Report Chart' as completely as possible before making the report.
2. Report immediately to Yellowknife using the 24 Hour Spill Report Line.

24 HOUR SPILL REPORT LINE 867-920-8130

3. Where telex is available, follow up immediately by sending a copy of the Spill Report Chart.

Facsimile 867-873-6924

4. RCMP communications may be used if other means are not available.

Additional Information or Assistance:

Environmental Protection Services,
Yellowknife (RWED)

Phone: 867-873-7654
Facsimile: 867-873-0221

Mackenzie Valley Land and
Water Board, Yellowknife

Phone: 867-669-0506
Facsimile: 867-873-6610

In preparation of making a report to the appropriate officials, the person who is reporting the spill must have specific information on hand requested by the government. The specific information needed is outlined on the following 'Spill Report' chart.

Government of Northwest Territories
SPILL REPORT
(Oil, Gas or Other Materials Considered Hazardous)

Phone 867-920-8130

A	Report Date	Date and time of Spill	
B	Location, Map Coordinates, and Direction of Flow		
C	Party Responsible		
D	Product Spilled and Estimated Quantities (Provide Metric Volumes/Weights if Possible)		
E	Cause of Spill		
F	Is Spill Terminated or Continuing		
G	Extent of Contaminated Area		
H	Factors Affecting Spill or Recovery – Temperatures, Wind, Snow, Ice, Terrain, Buildings, etc.		
I	Containment – Naturally, Booms, Dykes or Other. No Containment		
J	Action, if any, Taken or Proposed to Contain, Recover, Clean-Up or Dispose		
K	Do You Require Assistance	If So, What Form	
L	Hazards to Persons or Property or Environment – Fire, Drinking Water, Threat to Fish or Wildlife		
M	Comments and/or Recommendations		
Reported By		Position, Employer, Location	Telephone
Reported To		Position, Employer, Location	Telephone

Action Plan

Possible Spillage Sites

Meridian Lake Camp

Fuel Cache

Equipment

- protective wear (ie: hand, eye, foot, etc.)
- hand shovels, picks, axes, rakes
- competent fuel drums for transfer
- absorbent materials (ie: EnviroMat, sand, etc.)

Procedure

1. The person who first discovers a spill of hazardous material should follow the procedures set out in section entitled 'Initial Action'.
2. If the spill is not easily contained and/or cleaned up by the person who first discovers it, then that person will immediately report the incident to the Field Operations Supervisor.
3. Together with the Field Operations Supervisor, the situation will be reassessed and effective actions will be carried out in order to contain, clean up, and stop the flow of the spillage.

Such actions may include:

- a) determining the origin of the spill, if fuel drums have been punctured or are leaking due to unsatisfactory seals, the fuel should be transferred into competent drums and/or seals should be replaced,
- b) absorbents and booms should be placed in order to recover all the free fuel before it is allowed to seep into the surrounding ground and/or caught up within the run off water and allowed to pass into the lake,
- c) the construction of containment dykes and recovery trenches, using available hand tools to divert and control runoff from the fuel cache to allow for collection before contamination of waterways,
- d) continual monitoring of the site to ensure no subsequent or new spills have occurred,
- e) safe and proper disposal of any materials used during the containment and clean up of spilled fuel (ie: if the amount of fuel is extensive, possibility using old drums to collect and store the contaminated fuel for use in burn pits, burning or packaging of absorbent materials), and
- f) continual assessment of soils and waterways within the area in order to determine if further remediation is required.

Land Based Drill Sites

If fuel spillage has occurred at one or many of the drill sites, then it is first the responsibility of the drill company who has been contracted to do the job of successfully containing and cleaning up the site(s). If this is not accomplished to the satisfaction of the appropriate authorities, then it is the responsibility of Fortune Minerals Limited to carry out the proper procedures. The *Personnel, Materials, and Procedures* as outlined above concerning fuel spills at a fuel cache will not differ from those concerning drill sites and should therefore be followed accordingly.

Resource Inventory

Fortune Minerals Meridian Lake camp is not at an advanced stage of mining or extraction of ore. It is at an initial stage of exploration and diamond drilling. An inventory of manpower is difficult to list since many different crews performing different tasks are continually passing through on a weekly basis. Only a select few people remain at either camp throughout the field season. Each of these people, with the aid of others in camp, would be responsible for the successful clean up of any fuel spill. Therefore, the location and contact numbers of key personnel is unavailable at this time.

Resources Available on Site

Meridian Lake Camp

Tool

-hand shovels, picks, rakes, axes
-absorbents (EnviroMat)

Location

at camp
at camp

Training and Exercises

The following log describes the date, camp, supervisor in charge, personnel in attendance, and any additional comments that may want to be noted for a mock spill control and communications exercise. The Meridian Lake exploration campsite will have a number of these on hand and will keep records of training exercises performed.

Mock Spill Control & Communications Exercises Log

Date	Camp	Supervisor Name	In Attendance	Comments
	Y Meridian Lake			
	Y Meridian Lake			
	Y Meridian Lake			
	Y Meridian Lake			
	Y Meridian Lake			
	Y Meridian Lake			

Attachment I

Hazardous Material Information

The following list includes all potentially hazardous materials being used at the Meridian Lake camp:




Name of Chemical	Chemical Supplier	Potential Hazards
Diesel fuel	Shell or Matonabee	Fire, explosion, health, environment
Jet B fuel	Shell or Matonabee	Fire, explosion, health, environment
Regular unleaded gas	Shell or Matonabee	Fire, explosion, health, environment
Propane	ICG Propane	Fire, explosion, health, environment
Hydraulic oil	Shell or Matonabee	Fire, environment
Motor oil	Canadian Tire	Fire, environment
Drilling lubricants	Connors Drilling Ltd.	No potential hazards

Transportation of any of the above materials that cannot be handled by hand is generally moved using a helicopter. Winter conditions allow for the transportation of larger materials by use of skidoo's and sleighs.

Attached are the Material Safety Data Sheets for the hazardous materials listed above.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
	Not controlled		

Section 1. Chemical Product and Company Identification

Product Name	AJT 6000 STATIONARY JET TURBINE FLUID (LAND)	Code	AJT6000, 490-849-1
Synonym	Not available	Validated on	2/20/2004.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	Lubricant for stationary aeroderivative jet turbine engines used to power gas plant and pipeline compressors as well as power generation turbines running on natural gas, sewage gas or bio gas. AJT 6000 meets MIL-L-23699E specification.		

Section 2. Composition and Information on Ingredients

			Exposure Limits (ACGIH)		
Name	CAS #	% (W/W)	TLV-TWA(8 h)	STEL	CEILING
1) Synthetic Turbine Lubricant	Mixture	100	5 mg/m ³ (oil mist)	10 mg/m ³ (oil mist)	Not established
Manufacturer Recommendation	Not applicable				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	Prolonged or repeated contact may cause skin irritation, defatting, drying and dermatitis. Not expected to cause more than slight skin or eye irritation. With its relatively low vapour pressure, this product is not expected to be inhaled in any appreciable quantity at ambient conditions. If heated to high temperatures or subjected to mechanical actions which produce vapours or mists, inhalation may cause respiratory tract irritation. Ingestion may produce a laxative effect. For more information refer to Section 11 of this MSDS.
--------------------------	---

Section 4. First Aid Measures

Eye Contact	IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention.
Skin Contact	Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. Seek medical attention.
Inhalation	Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention.
Ingestion	DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	May be combustible at high temperature.	Flammable Limits	Not available
Flash Points	OPEN CUP: 270°C (518°F) (Cleveland)	Auto-ignition Temperature	Not available
Fire Hazards In Presence of Various Substances	Low fire hazard. This material must be heated before ignition will occur.	Explosion Hazards in Presence of Various Substances	Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire.
Products of Combustion	Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), phosphorus compounds (PO _x), smoke and irritating vapours as products of incomplete combustion.		

Fire Fighting Media and Instructions

NAERG96, GUIDE 171, Substances (low to moderate hazard). If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (0.5 mile) in all directions; also, consider initial evacuation for 800 meters (0.5 mile) in all directions. Shut off fuel to fire if it is possible to do so without hazard. If this is impossible, withdraw from area and let fire burn out under controlled conditions. Withdraw immediately in case of rising sound from venting safety device or any discolouration of tank due to fire. Cool containing vessels with water spray in order to prevent pressure build-up, autoignition or explosion. SMALL FIRE: use DRY chemicals, foam, water spray or CO₂. LARGE FIRE: use water spray, fog or foam. For small outdoor fires, portable fire extinguishers may be used, and self contained breathing apparatus (SCBA) may not be required. For all indoor fires and any significant outdoor fires, SCBA is required. Respiratory and eye protection are required for fire fighting personnel.

Section 6. Accidental Release Measures**Material Release or Spill**

Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. Extinguish all ignition sources. Stop leak if safe to do so. Dike spilled material. Use appropriate inert absorbent material to absorb spilled product. Collect used absorbent for later disposal. Avoid contact with spilled material. Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Notify appropriate authorities immediately.

Section 7. Handling and Storage**Handling**

Avoid contact with any sources of ignition, flames, heat, and sparks. Avoid eye contact. Avoid skin contact. Avoid inhalation of product vapours or mists. Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product. Properly dispose of contaminated leather articles including shoes that cannot be decontaminated.

Storage

Store away from incompatible and reactive materials (See section 5 and 10). Keep container tightly closed. Store in dry, cool, well-ventilated area.

Section 8. Exposure Controls/Personal Protection**Engineering Controls**

For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.

Personal Protection - The selection of personal protective equipment varies, depending upon conditions of use.**Eyes**

Eye protection (i.e., safety glasses, safety goggles and/or face shield) should be determined based on conditions of use. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered.

Body

Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn.

Respiratory

Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation.

Hands

Wear appropriate chemically protective gloves. When handling hot product ensure gloves are heat resistant and insulated.

Feet

Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Liquid.	Viscosity	25.60 cSt @ 40°C (104°F), 5.12 cSt @ 100°C (212°F)
Colour	Amber.	Pour Point	-57°C (-71°F)
Odour	Mild.	Softening Point	Not applicable.
Odour Threshold	Not available	Dropping Point	Not applicable.
Boiling Point	Not available	Penetration	Not applicable.
Density	0.9947 kg/L @ 15°C (59°F).	Oil / Water Dist. Coefficient	Not available
Vapour Density	Not available	Ionicity (in water)	Not available
Vapour Pressure	Negligible at ambient temperature and pressure.	Dispersion Properties	Not available
Volatility	Non-volatile.	Solubility	Insoluble in water.

Section 10. Stability and Reactivity

Corrosivity	Not available		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents, acids and alkalis.	Decomposition Products	May release COx, NOx, POx, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation and ingestion.
Acute Lethality	Not available
Chronic or Other Toxic Effects	
Dermal Route:	Prolonged or repeated contact may defat and dry skin, and cause dermatitis. Short-term exposure is expected to cause only slight irritation, if any.
Inhalation Route:	With its relatively low vapour pressure, this product is not expected to be inhaled in any appreciable quantity at ambient conditions. If heated to high temperatures or subjected to mechanical actions which produce vapours or mists, inhalation may cause respiratory tract irritation.
Oral Route:	Ingestion of this product may lead to aspiration of the liquid, especially if vomiting occurs. This may result in chemical pneumonitis (inflammation of the lungs) and/or pulmonary edema (an accumulation of fluid in the lungs). May produce a laxative effect.
Eye Irritation/Inflammation:	Short-term exposure is expected to cause only slight irritation, if any.
Immunotoxicity:	Not available
Skin Sensitization:	Contact with this product is not expected to cause skin sensitization, based upon the available data and the known hazards of the components.
Respiratory Tract Sensitization:	Contact with this product is not expected to cause respiratory tract sensitization, based upon the available data and the known hazards of the components.
Mutagenic:	This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause mutagenicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a mutagen.
Reproductive Toxicity:	This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause reproductive toxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a reproductive toxin.
Teratogenicity/Embryotoxicity:	This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause teratogenicity and/or embryotoxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a teratogen/embryotoxin.
Carcinogenicity (ACGIH):	This product is not known to contain any chemicals at reportable quantities that are listed as Group A1 or A2 carcinogens by ACGIH.
Carcinogenicity (IARC):	This product is not known to contain any chemicals at reportable quantities that are listed as Group 1, 2A, or 2B carcinogens by IARC.
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.
Carcinogenicity (IRIS):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by IRIS.
Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.
Other Considerations	No additional remark.

Section 12. Ecological Information

Environmental Fate	Not available	Persistence/Bioaccumulation Potential	Not available
BOD5 and COD	Not available	Products of Biodegradation	Not available
Additional Remarks	No additional remark.		





Section 13. Disposal Considerations

Waste Disposal	Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations.
-----------------------	--

Section 14. Transport Information

TDG Classification	Not a hazardous material for transport according to the TDG Regulations. (Canada)	Special Provisions for Transport	Not applicable.
---------------------------	---	---	-----------------

Section 15. Regulatory Information

Other Regulations		This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).																														
		All components of this formulation are listed on the US EPA-TSCA Inventory.																														
		All components of this product are on the European Inventory of Existing Commercial Chemical Substances (EINECS).																														
		This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.																														
		Please contact Product Safety for more information.																														
DSD/DPD (Europe)		Not evaluated	HCS (U.S.A.)		Does not meet the definitions of a health or physical hazard according to the OSHA - Hazard Communication Standard. (United States)																											
ADR (Europe) (Pictograms)		NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.	DOT (U.S.A.) (Pictograms)																													
HMIS (U.S.A.)		<table><tr><td>Health Hazard</td><td>1</td></tr><tr><td>Fire Hazard</td><td>1</td></tr><tr><td>Reactivity</td><td>0</td></tr><tr><td>Personal Protection</td><td>B</td></tr></table>	Health Hazard	1	Fire Hazard	1	Reactivity	0	Personal Protection	B	NFPA (U.S.A.)		<table><tr><td rowspan="5">Health</td><td rowspan="5"></td><td>Fire Hazard</td><td>Rating</td><td>0 Insignificant</td></tr><tr><td rowspan="4">Reactivity</td><td></td><td>1 Slight</td></tr><tr><td></td><td>2 Moderate</td></tr><tr><td></td><td>3 High</td></tr><tr><td></td><td>4 Extreme</td></tr><tr><td colspan="2">Specific hazard</td><td colspan="2"></td><td></td></tr></table>	Health		Fire Hazard	Rating	0 Insignificant	Reactivity		1 Slight		2 Moderate		3 High		4 Extreme	Specific hazard				
Health Hazard	1																															
Fire Hazard	1																															
Reactivity	0																															
Personal Protection	B																															
Health		Fire Hazard	Rating	0 Insignificant																												
		Reactivity		1 Slight																												
				2 Moderate																												
				3 High																												
				4 Extreme																												
Specific hazard																																

Section 16. Other Information

References	Available upon request. * Marque de commerce de Petro-Canada - Trademark
-------------------	---

Glossary

ACGIH - American Conference of Governmental Industrial Hygienists
 ADR - Agreement on Dangerous goods by Road (Europe)
 ASTM - American Society for Testing and Materials ()
 BOD5 - Biological Oxygen Demand in 5 days
 CAN/CGA B149.2 Propane Installation Code
 CAS - Chemical Abstract Services
 CEPA - Canadian Environmental Protection Act
 CERCLA - Comprehensive Environmental Response, Compensation and Liability Act
 CFR - Code of Federal Regulations
 CHIP - Chemicals Hazard Information and Packaging Approved Supply List
 COD5 - Chemical Oxygen Demand in 5 days
 CPR - Controlled Products Regulations
 DOT - Department of Transport
 DSC - Dangerous Substances Classification and Labeling (Europe)
 DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)
 DSL - Domestic Substance List
 EEC/EU - European Economic Community/European Union
 EINECS - European Inventory of Existing Commercial Chemical Substances
 EPCRA - Emergency Planning and Community Right to Know Act
 FDA - Food and Drug Administration
 FIFRA - Federal Insecticide, Fungicide and Rodenticide Act
 HCS - Hazardous Communication System
 HMIS - Hazardous Material Information System
 IARC - International Agency for Research on Cancer

IRIS - Integrated Risk Information System
 LD50/LC50 - Lethal Dose/Concentration kill 50%
 LDLo/LCLo - Lowest Published Lethal Dose/Concentration
 NAERG'96 - North American Emergency Response Guide Book (1996)
 NFPA - National Fire Prevention Association
 NIOSH - National Institute for Occupational Safety & Health
 NPRI - National Pollutant Release Inventory
 NSNR - New Substances Notification Regulations (Canada)
 NTP - National Toxicology Program
 OSHA - Occupational Safety & Health Administration
 PEL - Permissible Exposure Limit
 RCRA - Resource Conservation and Recovery Act
 SARA - Superfund Amendments and Reorganization Act
 SD - Single Dose
 STEL - Short Term Exposure Limit (15 minutes)
 TDG - Transportation Dangerous Goods (Canada)
 TDLo/TCLo - Lowest Published Toxic Dose/Concentration
 TLM - Median Tolerance Limit
 TLV-TWA - Threshold Limit Value-Time Weighted Average
 TSCA - Toxic Substances Control Act
 USEPA - United States Environmental Protection Agency
 USP - United States Pharmacopoeia
 WHMIS - Workplace Hazardous Material Information System

For Copy of MSDS

Prepared by Product Safety - JDW on 2/20/2004.

The Canadian Controlled Products Regulations (CPR) (Under the Hazardous Products Act, part of the WHMIS legislation) only apply to WHMIS Controlled (i.e., hazardous) products. Therefore, the CPR and the 3-year update rule specified therein do not apply to WHMIS Non-Controlled products. Although this is true, customarily Petro-Canada reviews and updates Non-Controlled product MSDS if a customer requests such an update. These Non-Controlled product updates are given a lower priority than Controlled products but are handled as soon as practicable. If you would like to verify if the MSDS you have is the most current, or you require any further information, please contact:

Internet: www.petro-canada.ca/msds

Lubricants:

Western Canada, telephone: 1-800-661-1199; fax: (780) 464-9564

Ontario & Central Canada, telephone: 1-800-268-5850 and (905) 822-4222; fax: 1-800-201-6285

Quebec & Eastern Canada, telephone: 1-800-576-1686; fax: 800-201-6285








For Product Safety Information: (905) 804-4752

Data entry by Product Safety - RS.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
 	B-2, D-2A, D-2B	   	

Section 1. Chemical Product and Company Identification

Product Name	GASOLINE, UNLEADED	Code	W102E
Synonym	Regular, Unleaded Gasoline (US Grade), Mid-Grade, Plus, Super, WinterGas, SummerGas, Supreme, SuperClean WinterGas, RegularClean, PlusClean, Premium, marked or dyed gasoline, Super Premium (94 RO)	Validated on	6/20/2001.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	Unleaded gasoline is used in spark ignition engines including motor vehicles, inboard and outboard boat engines, small engines such as chain saws and lawn mowers, and recreational vehicles.		

Section 2. Composition and Information on Ingredients

			Exposure Limits (ACGIH)		
Name	CAS #	% (V/V)	TLV-TWA(8 h)	STEL	CEILING
1) Gasoline	8006-61-9	85-100	300 ppm (890 mg/m ³)	500 ppm (1480 mg/m ³)	Not established
2) Methyl tert-butyl ether	1634-04-4	0-15	40 ppm (144mg/m ³)	Not established	Not established
Manufacturer Recommendation	Not applicable				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	Possible cancer hazard. Inhalation of vapours can be irritating to respiratory tract and cause CNS depression with symptoms of nausea, headaches, vomiting, dizziness, fatigue, light-headedness, reduced coordination, unconsciousness and possibly death. Skin and eye contact can cause irritation. Toxic if ingested. For more information, refer to Section 11.
--------------------------	--

Section 4. First Aid Measures

Eye Contact	IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention.
Skin Contact	Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. Seek medical attention.
Inhalation	Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention.
Ingestion	DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	Flammable liquid (NFPA).	Flammable Limits	Lower: 1.3%; Upper: 7.6% (NFPA).
Flash Points	Closed Cup: -50 to -38°C (-58 to -36°F), ASTM D56 Standard Test Method for Flash Point by Tag Closed Tester.	Auto-Ignition Temperature	257°C (495°F) (NFPA).
Fire Hazards in Presence of Various Substances	Extremely flammable in presence of open flames, sparks, and heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. Rapid escape of vapour may generate static charge causing ignition.	Explosion Hazards in Presence of Various Substances	Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire. Vapours may form explosive mixtures with air.
Products of Combustion	Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), polynuclear aromatic hydrocarbons, phenols, smoke and irritating vapours as products of incomplete combustion.		

**Fire Fighting
Media and
Instructions**

NAERG96, GUIDE 128, flammable/combustible liquid (non-polar/water-immiscible). CAUTION: This product has a very low flash point, use of water spray when fighting fire may be inefficient. SMALL FIRE: Use DRY chemicals, CO₂, water spray or foam. LARGE FIRE: Use water spray, fog or foam. DO NOT use water jet. If tank, rail car or tank truck is involved in a fire, ISOLATE for 1600 meters (1 mile) in all directions; also, consider initial evacuation for 1600 meters (1 mile) in all directions. DO NOT extinguish a leaking gas flame unless leak can be stopped. Shut off fuel to fire if it is possible to do so without hazard. If this is impossible, withdraw from area and let fire burn out under controlled conditions. Withdraw immediately in case of rising sound from venting safety device or any discolouration of tank due to fire. Cool containing vessels with water spray in order to prevent pressure build-up, autoignition or explosion. Avoid flushing spilled material into sewers, streams or other bodies of water. Self-contained breathing apparatus (SCBA) will be required if approaching the fire from downwind, or to enter enclosed areas or buildings.

Section 6. Accidental Release Measures**Material Release
or Spill**

NAERG96, GUIDE 128, flammable/combustible liquid (non-polar/water-immiscible). Evacuate in a downwind direction for at least 300 meters (1000 feet). ELIMINATE ALL IGNITION SOURCES. Ventilate closed spaces before entering. By forced ventilation, maintain concentration of vapour below the range of explosive mixture. Avoid contact, fully-encapsulating, vapour-protective clothing should be worn for spills and leaks with no fire. Stop leak if without risk. Use vapour suppressing foam or water spray to reduce vapours; it may reduce vapour, but it may not prevent ignition in closed spaces; isolate area until vapour has dispersed. Contain spill. Absorb with inert absorbents such as dry clay, or diatomaceous earth, or recover using electrically grounded explosion-proof pumps. Avoid inhaling dust of diatomaceous earth for it may contain silica (very fine particle size), making this a potential respiratory hazard. Place used absorbent in closed metal containers for later disposal or burn absorbent in a suitable combustion chamber. DO NOT FLUSH TO SEWERS, STREAMS OR OTHER BODIES OF WATER. Check with applicable jurisdiction for specific disposal requirements of spilled material and empty containers. Notify the appropriate authorities immediately.

Section 7. Handling and Storage**Handling**

Keep away from heat, spark and other sources of ignition. Empty container may contain flammable/explosive residues or vapours. DO NOT reuse empty containers without commercial cleaning or reconditioning. Ground/bond line and equipment during pumping or transfer to avoid accumulation of static charge. DO NOT USE AS CLEANING FLUID OR SIPHON BY MOUTH. Wear proper protective equipment. Avoid inhalation and contact with skin or eyes. Practice good personal hygiene. Wash hands after handling and before eating. Launder work clothes frequently. Discard saturated leather goods.

Storage

Store in cool, dry, isolated, well-ventilated area, and away from direct sunlight, sources of ignition and incompatibles. Flammable materials should be stored in a separate safety storage cabinet or room. Ground all equipment containing material.

Section 8. Exposure Controls/Personal Protection**Engineering Controls**

For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.

Personal Protection - The selection of personal protective equipment varies, depending upon conditions of use.**Eyes**

Eye protection (i.e., safety glasses, safety goggles and/or face shield) should be determined based on conditions of use. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered.

Body

Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn.

Respiratory

Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation.

Hands

Wear appropriate chemically protective gloves. When handling hot product ensure gloves are heat resistant and insulated.

Feet

Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Clear liquid.	Viscosity	0.6 cSt.
Colour	Clear to slightly yellow, undyed liquid. May be dyed red for taxation purposes.	Pour Point	Not applicable.
Odour	Gasoline. MTBE has a terpene-like odour.	Softening Point	Not applicable.
Odour Threshold	Less than 1 ppm.	Dropping Point	Not applicable.
Boiling Point	25 to 220°C (77 to 428°F) Initial boiling point by ASTM D86 Standard Test Method.	Penetration	Not applicable.
Density	0.7 kg/L @ 15°C (59°F).	Oil / Water Dist. Coefficient	Not available
Vapour Density	3 to 4 (Air = 1) (NFPA).	Ionicity (in water)	Insoluble in water.
Vapour Pressure	107 kPa @ 37.8°C (100°F)	Dispersion Properties	Not available

Continued on Next Page

Available in French

Volatility	Volatile.	Solubility	Hydrocarbon components virtually insoluble in water. Soluble in alcohol, ether, chloroform, and benzene. Dissolves fats, oils and natural resins.
-------------------	-----------	-------------------	---

Section 10. Stability and Reactivity

Corrosivity	Non corrosive.		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents, acids.	Decomposition Products	May release COx, NOx, phenols, polynuclear aromatic hydrocarbons, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation, and ingestion.
Acute Lethality	Gasoline: Acute oral toxicity (LD50): 13 600 mg/kg (rat). Acute dermal toxicity (LD50): >5000 mg/kg (rabbit). Acute inhalation toxicity (LC50): >300 000 mg/m ³ /4h (rat). MTBE: Acute oral toxicity (LD50): 29630 mg/kg (rat). Acute dermal toxicity (LD50): >6800 mg/kg (rabbit). Acute inhalation toxicity (LC50): 23 576 ppm/4h (rat).
Chronic or Other Toxic Effects	
Dermal Route:	This product can cause skin irritation. Prolonged or repeated contact with skin may cause dermatitis.
Inhalation Route:	Inhalation of vapours can be irritating to respiratory tract and cause CNS depression with symptoms of nausea, headaches, vomiting, dizziness, fatigue, light-headedness, reduced coordination, unconsciousness and possibly death.
Oral Route:	Swallowing or vomiting of the liquid may result in aspiration into the lungs. Can cause CNS depression. (See Inhalation Route for symptoms).
Eye Irritation/Inflammation:	Can cause irritation to the eyes.
Immunotoxicity:	Not available
Skin Sensitization:	This product is not expected to be a skin sensitizer, based on the available data and the known hazards of the components.
Respiratory Tract Sensitization:	This product is not expected to be a respiratory tract sensitizer, based on the available data and the known hazards of the components.
Mutagenic:	This product is not considered to be a mutagen, based on the available data and the known hazards of the components.
Reproductive Toxicity:	This product is not considered to be a reproductive hazard, based on the available data and the known hazards of the components.
Teratogenicity/Embryotoxicity:	This product is not considered to be a teratogen or an embryotoxin, based on the available data and the known hazards of the components.
Carcinogenicity (ACGIH):	ACGIH A3: animal carcinogen. [Gasoline, MTBE]
Carcinogenicity (IARC):	IARC Group 2B: possibly carcinogenic to humans. [Gasoline]
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.
Carcinogenicity (IRIS):	Not available
Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.
Other Considerations	Unleaded gasoline caused kidney effects in male rats and liver effects in female mice.

Section 12. Ecological Information

Environmental Fate	Not available	Persistence/Bioaccumulation Potential	Not available
BOD5 and COD	Not available	Products of Biodegradation	Not available
Additional Remarks	Not available		

Section 13. Disposal Considerations

Waste Disposal Preferred waste management priorities are: (1) recycle or reprocess; (2) incineration with energy recovery; (3) disposal at licensed waste disposal facility. Ensure that disposal or reprocessing is in compliance with government requirements and local disposal regulations. Consult your local or regional authorities.

Section 14. Transport Information

TDG Classification	GASOLINE, 3, UN1203, PGII (CL-TDG)	Special Provisions for Transport	See Transportation of Dangerous Goods Regulations.
---------------------------	------------------------------------	---	--

Section 15. Regulatory Information

Other Regulations CEPA: This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List). EPA: All components of this formulation are listed on the US EPA-TSCA Inventory.

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR. Please contact Product Safety for more information.

DSD/DPD (Europe) Not evaluated.

HCS (U.S.A.)

CLASS: Contains material which may cause cancer.
CLASS: Flammable liquid having a flash point lower than 37.8°C (100°F).
CLASS: Irritating substance.
CLASS: Target organ effects.

ADR (Europe) (Pictograms)

NOT EVALUATED FOR EUROPEAN TRANSPORT
NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.

DOT (U.S.A) (Pictograms)



HMIS (U.S.A.)

Health Hazard	2
Fire Hazard	4
Reactivity	0
Personal Protection	H

NFPA (U.S.A.)

Health



Fire Hazard

Reactivity

Specific hazard

Rating

0	Insignificant
1	Slight
2	Moderate
3	High
4	Extreme

Section 16. Other Information

References Available upon request.
* Marque de commerce de Petro-Canada - Trademark

Glossary

ACGIH - American Conference of Governmental Industrial Hygienists
ADR - Agreement on Dangerous goods by Road (Europe)
ASTM - American Society for Testing and Materials ()
BOD5 - Biological Oxygen Demand in 5 days
CAN/CGA B149.2 Propane Installation Code
CAS - Chemical Abstract Services
CEPA - Canadian Environmental Protection Act
CERCLA - Comprehensive Environmental Response, Compensation and Liability Act
CFR - Code of Federal Regulations
CHIP - Chemicals Hazard Information and Packaging Approved Supply List
COD5 - Chemical Oxygen Demand in 5 days
CPR - Controlled Products Regulations
DOT - Department of Transport
DSDL - Dangerous Substances Classification and Labeling (Europe)
DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)
DSL - Domestic Substance List
EEC/EU - European Economic Community/European Union
EINECS - European Inventory of Existing Commercial Chemical Substances
EPCRA - Emergency Planning and Community Right to Know Act
FDA - Food and Drug Administration
FIFRA - Federal Insecticide, Fungicide and Rodenticide Act
HCS - Hazardous Communication System
HMIS - Hazardous Material Information System
IARC - International Agency for Research on Cancer

IRIS - Integrated Risk Information System
LD50/LC50 - Lethal Dose/Concentration kill 50%
LDLo/LCLo - Lowest Published Lethal Dose/Concentration
NAERG'96 - North American Emergency Response Guide Book (1996)
NFPA - National Fire Prevention Association
NIOSH - National Institute for Occupational Safety & Health
NPRI - National Pollutant Release Inventory
NSNR - New Substances Notification Regulations (Canada)
NTP - National Toxicology Program
OSHA - Occupational Safety & Health Administration
PEL - Permissible Exposure Limit
RCRA - Resource Conservation and Recovery Act
SARA - Superfund Amendments and Reorganization Act
SD - Single Dose
STEL - Short Term Exposure Limit (15 minutes)
TDG - Transportation Dangerous Goods (Canada)
TDLo/TCLo - Lowest Published Toxic Dose/Concentration
TLM - Median Tolerance Limit
TLV-TWA - Threshold Limit Value-Time Weighted Average
TSCA - Toxic Substances Control Act
USEPA - United States Environmental Protection Agency
USP - United States Pharmacopoeia
WHMIS - Workplace Hazardous Material Information System

For Copy of MSDS**Fuels & Solvents:**

Western Canada, telephone: 403-296-4158; fax: 403-296-6551
Ontario & Central Canada, telephone: 1-800-668-0220; fax: 1-800-837-1228
Quebec & Eastern Canada, telephone: 514-640-8308; fax: 514-640-8385

For Product Safety Information: (905) 804-4752

Prepared by Product Safety - TAR on 6/20/2001.

Data entry by Product Safety - JDW.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
	B-3, D-2B		

Section 1. Chemical Product and Company Identification

Product Name	DIESEL FUEL	Code	W104, W293 SAP: 120, 121, 122, 287
Synonym	Diesel 50, Diesel 50 LS, #1 Diesel, #1 Diesel LS, Diesel LC, Seasonal Diesel, Seasonal Diesel LS, Diesel AA, Domestic Marine Diesel, International marine Diesel, Seasonal Diesel Locomotive, Domestic Marine diesel LS, diesel -20°C (LS), LSD, Low Sulphur Diesel, dyed diesel, marked diesel, coloured diesel, Naval Distillate, Ultra Low Sulphur Diesel, ULS Diesel, Mining Diesel, Mining Diesel Special, Mining Diesel Special LS, High Flash Mining Diesel, Furnace Oil, Stove Oil.	Validated on	2/6/2004.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	Diesel fuels are distillate fuels suitable for use in high and medium speed internal combustion engines of the compression ignition type. Mining Diesel has a higher flash point requirement, for safe use in underground mines.		

Section 2. Composition and Information on Ingredients

			Exposure Limits (ACGIH)		
Name	CAS #	% (V/V)	TLV-TWA(8 h)	STEL	CEILING
1) Diesel oil.	68334-30-5	>99.9	100 mg/m ³ (as total hydrocarbons) *	Not established	Not established
2) Proprietary additives.	Not available	<0.1	Not established	Not established	Not established
Aromatic content is 50% maximum (benzene: nil). Sulphur content is 0-0.50%.					
Manufacturer Recommendation	* Avoid prolonged or repeated skin contact to diesel fuels which can lead to dermal irritation and may be associated with an increased risk of skin cancer.				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	Combustible liquid. Exercise caution when handling this material. Contact with this product may cause skin and eye irritation. Prolonged or repeated contact may cause skin irritation, defatting, drying and dermatitis. Inhalation of this product may cause respiratory tract irritation and Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death. Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract. For more information refer to Section 11 of this MSDS.
--------------------------	--

Section 4. First Aid Measures

Eye Contact	IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention.
Skin Contact	Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. Seek medical attention.
Inhalation	Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention.
Ingestion	DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	Class II - combustible liquid (NFPA).	Flammable Limits	LOWER: 0.7%, UPPER: 6% (NFPA)
Flash Points	Diesel Fuel: Closed Cup: >40°C (>104°F) Marine Diesel Fuel: Closed Cup: >60°C (>140°F) Mining Diesel: Closed Cup: 52°C (126°F)	Auto-Ignition Temperature	225°C (437°F)
Fire Hazards in Presence of Various Substances	Flammable in presence of open flames, sparks, or heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. This product can accumulate static charge and ignite. May accumulate in confined spaces.	Explosion Hazards in Presence of Various Substances	Containers may explode in heat of fire. Do not cut, weld, heat, drill or pressurize empty container. Vapour explosion hazard indoors, outdoors or in sewers. Runoff to sewer may create fire or explosion hazard.
Products of Combustion	Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), sulphur oxides (SO _x), sulphur compounds (H ₂ S), water vapour (H ₂ O), smoke and irritating vapours as products of incomplete combustion. See Section 11 (Other Considerations) for information regarding the toxicity of the combustion products.		
Fire Fighting Media and Instructions	<p>NAERG96, GUIDE 128, Flammable liquids (Non-polar/Water-immiscible). CAUTION: This product has a moderate flash point above 40°C: Use of water spray when fighting fire may be inefficient.</p> <p>If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also consider initial evacuation for 800 meters (1/2 mile) in all directions.</p> <p>SMALL FIRES: Dry chemical, CO₂, water spray or regular foam. LARGE FIRES: Water spray, fog or regular foam. Do not use straight streams. Move containers from fire area if you can do it without risk. Fires Involving Tanks or Car/Trailer Loads: Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.</p> <p>Cool containers with flooding quantities of water until well after fire is out. Withdraw immediately in case of rising sound from venting devices or any discolouration of tank. ALWAYS stay away from the ends of tanks. For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible withdraw from area and let fire burn. Wear positive pressure self-contained breathing apparatus (SCBA). Structural firefighters' protective clothing will only provide limited protection.</p>		

Section 6. Accidental Release Measures

Material Release or Spill	Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. IN THE EVENT OF A LARGE SPILL CONSIDER THE FOLLOWING CONTROL MEASURES: Extinguish all ignition sources. Stop leak if safe to do so. Ventilate area. Dike spilled material. Use appropriate inert absorbent material to absorb spilled product. Collect used absorbent for later disposal. Avoid contact with spilled material. Avoid breathing vapours or mists of material. Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Evacuate non-essential personnel. Ensure clean-up personnel wear appropriate personal protective equipment. Ground and bond all equipment used to clean up the spilled material, as it may be a static accumulator. Notify appropriate authorities immediately.
----------------------------------	---

Section 7. Handling and Storage

Handling	COMBUSTIBLE MATERIAL. Handle with care. Avoid contact with any sources of ignition, flames, heat, and sparks. Avoid skin contact. Avoid eye contact. Avoid inhalation of product vapours or mists. Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product. Properly dispose of contaminated leather articles including shoes that cannot be decontaminated. Avoid confined spaces and areas with poor ventilation. Ensure all equipment is grounded/bonded. Wear proper personal protective equipment (See Section 8).
Storage	Store away from heat and sources of ignition. Store in dry, cool, well-ventilated area. Store away from incompatible and reactive materials (See section 5 and 10). Ensure the storage containers are grounded/bonded.

Section 8. Exposure Controls/Personal Protection

Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection	The selection of personal protective equipment varies, depending upon conditions of use.
Eyes	Eye protection (i.e., safety glasses, safety goggles and/or face shield) should be determined based on conditions of use. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered.
Body	Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn.
Respiratory	Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation.
Hands	Wear appropriate chemically protective gloves. When handling hot product ensure gloves are heat resistant and insulated.
Feet	Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Bright oily liquid.	Viscosity	1.3 - 4.1 cSt @ 40°C (104°F)
Colour	Clear to yellow / brown (may be dyed for taxation purposes).	Pour Point	Variable, -50°C to 0°C (-58°F to -32°F)
Odour	Petroleum oil like.	Softening Point	Not applicable.
Odour Threshold	Not available	Dropping Point	Not applicable.
Boiling Point	150 - 371°C (302-700°F)	Penetration	Not applicable.
Density	0.80 - 0.85 kg/L @ 15°C (59°F)	Oil / Water Dist. Coefficient	Not available
Vapour Density	4.5 (Air = 1)	Ionicity (in water)	Not applicable.
Vapour Pressure	Not available	Dispersion Properties	Not available
Volatility	Semivolatile to volatile.	Solubility	Insoluble in cold water, soluble in non-polar hydrocarbon solvents.

Section 10. Stability and Reactivity

Corrosivity	Not available		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents and acids.	Decomposition Products	May release COx, NOx, SOx, H2S, H2O, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation, and ingestion.
Acute Lethality	Acute oral toxicity (LD50): 7500 mg/kg (rat).
Chronic or Other Toxic Effects	
Dermal Route:	This product contains a component (at $\geq 1\%$) that can cause skin irritation. Therefore, this product is considered to be a skin irritant. Prolonged or repeated contact may defat and dry skin, and cause dermatitis. (See Other Considerations)
Inhalation Route:	Inhalation of this product may cause respiratory tract irritation. Inhalation of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death.
Oral Route:	Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract. Ingestion of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death.
Eye Irritation/Inflammation:	This product contains a component (at $\geq 1\%$) that can cause eye irritation. Therefore, this product is considered to be an eye irritant.
Immunotoxicity:	Not available
Skin Sensitization:	Contact with this product is not expected to cause skin sensitization, based upon the available data and the known hazards of the components.
Respiratory Tract Sensitization:	Contact with this product is not expected to cause respiratory tract sensitization, based upon the available data and the known hazards of the components.
Mutagenic:	This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause mutagenicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a mutagen.
Reproductive Toxicity:	This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause reproductive toxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a reproductive toxin.
Teratogenicity/Embryotoxicity:	This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause teratogenicity and/or embryotoxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a teratogen/embryotoxin.
Carcinogenicity (ACGIH):	ACGIH A3: animal carcinogen. [Diesel oil] (See Other Considerations)
Carcinogenicity (IARC):	This product is not known to contain any chemicals at reportable quantities that are listed as Group 1, 2A, or 2B carcinogens by IARC.
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.
Carcinogenicity (IRIS):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by IRIS.

Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.
Other Considerations	Avoid prolonged or repeated skin contact to diesel fuels which can lead to dermal irritation and may be associated with an increased risk of skin cancer. Diesel engine exhaust particulate is probably carcinogenic to humans (IARC Group 2A).

Section 12. Ecological Information

Environmental Fate	Not available	Persistence/Bioaccumulation Potential	Not available
BOD5 and COD	Not available	Products of Biodegradation	Not available
Additional Remarks	No additional remark.		





Section 13. Disposal Considerations

Waste Disposal	Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations.
----------------	--

Section 14. Transport Information

TDG Classification	DIESEL FUEL, 3, UN1202, PGIII (CL-TDG)	Special Provisions for Transport	See Transportation of Dangerous Goods Regulations.
--------------------	--	----------------------------------	--

Section 15. Regulatory Information

Other Regulations	This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).																								
	All components of this formulation are listed on the US EPA-TSCA Inventory.																								
	All components of this product are on the European Inventory of Existing Commercial Chemical Substances (EINECS).																								
	This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.																								
	Please contact Product Safety for more information.																								
DSD/DPD (Europe)	Not evaluated.	HCS (U.S.A.)	CLASS: Irritating substance. CLASS: Target organ effects. CLASS: Combustible liquid having a flash point between 37.8°C (100°F) and 93.3°C (200°F).																						
ADR (Europe) (Pictograms)	NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.	DOT (U.S.A) (Pictograms)																							
HMIS (U.S.A.)	<table><tr><td>Health Hazard</td><td>2</td></tr><tr><td>Fire Hazard</td><td>2</td></tr><tr><td>Reactivity</td><td>0</td></tr><tr><td>Personal Protection</td><td>H</td></tr></table>	Health Hazard	2	Fire Hazard	2	Reactivity	0	Personal Protection	H	NFPA (U.S.A.)	<table><tr><td>Health</td><td></td><td>Fire Hazard</td><td>0</td></tr><tr><td></td><td></td><td>Reactivity</td><td>0</td></tr><tr><td></td><td></td><td>Specific hazard</td><td></td></tr></table>	Health		Fire Hazard	0			Reactivity	0			Specific hazard		Rating	0 Insignificant 1 Slight 2 Moderate 3 High 4 Extreme
Health Hazard	2																								
Fire Hazard	2																								
Reactivity	0																								
Personal Protection	H																								
Health		Fire Hazard	0																						
		Reactivity	0																						
		Specific hazard																							

Section 16. Other Information

References	<p>Available upon request.</p> <p>* Marque de commerce de Petro-Canada - Trademark</p>
Glossary	<div> <p>ACGIH - American Conference of Governmental Industrial Hygienists</p> <p>ADR - Agreement on Dangerous goods by Road (Europe)</p> <p>ASTM - American Society for Testing and Materials (</p> <p>BOD5 - Biological Oxygen Demand in 5 days</p> <p>CAN/CGA B149.2 Propane Installation Code</p> <p>CAS - Chemical Abstract Services</p> <p>CEPA - Canadian Environmental Protection Act</p> <p>CERCLA - Comprehensive Environmental Response, Compensation and Liability Act</p> <p>CFR - Code of Federal Regulations</p> <p>CHIP - Chemicals Hazard Information and Packaging Approved Supply List</p> <p>COD5 - Chemical Oxygen Demand in 5 days</p> <p>CPR - Controlled Products Regulations</p> <p>DOT - Department of Transport</p> <p>DSCL - Dangerous Substances Classification and Labeling (Europe)</p> </div> <div> <p>IRIS - Integrated Risk Information System</p> <p>LD50/LC50 - Lethal Dose/Concentration kill 50%</p> <p>LDLo/LCLo - Lowest Published Lethal Dose/Concentration</p> <p>NAERG'96 - North American Emergency Response Guide Book (1996)</p> <p>NFPA - National Fire Prevention Association</p> <p>NIOSH - National Institute for Occupational Safety & Health</p> <p>NPRI - National Pollutant Release Inventory</p> <p>NSNR - New Substances Notification Regulations (Canada)</p> <p>NTP - National Toxicology Program</p> <p>OSHA - Occupational Safety & Health Administration</p> <p>PEL - Permissible Exposure Limit</p> <p>RCRA - Resource Conservation and Recovery Act</p> <p>SARA - Superfund Amendments and Reorganization Act</p> <p>SD - Single Dose</p> <p>STEL - Short Term Exposure Limit (15 minutes)</p> </div>

DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)
DSL - Domestic Substance List
EEC/EU - European Economic Community/European Union
EINECS - European Inventory of Existing Commercial Chemical Substances
EPCRA - Emergency Planning and Community Right to Know Act
FDA - Food and Drug Administration
FIFRA - Federal Insecticide, Fungicide and Rodenticide Act
HCS - Hazardous Communication System
HMIS - Hazardous Material Information System
IARC - International Agency for Research on Cancer

TDG - Transportation Dangerous Goods (Canada)
TDLo/TCLo - Lowest Published Toxic Dose/Concentration
Tm - Median Tolerance Limit
TLV-TWA - Threshold Limit Value-Time Weighted Average
TSCA - Toxic Substances Control Act
USEPA - United States Environmental Protection Agency
USP - United States Pharmacopoeia
WHMIS - Workplace Hazardous Material Information System

For Copy of MSDS

Internet: www.petro-canada.ca/msds

Western Canada, Ontario & Central Canada, telephone: 1-800-668-0220; fax: 1-800-837-1228

Quebec & Eastern Canada, telephone: 514-640-8308; fax: 514-640-8385

For Product Safety Information: (905) 804-4752




Prepared by Product Safety - JDW on 2/6/2004.

Data entry by Product Safety - JDW.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
	Not controlled		

Section 1. Chemical Product and Company Identification

Product Name	RELiance AW HYDRAULIC OIL 32, 46, 68	Code	490-143, RELAW32 490-144, RELAW46 490-145, RELAW68
Synonym	Not available.	Validated on	6/15/2001.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	These products are designed for use as heavy duty hydraulic power transmission fluids and for lubrication where good anti-wear and anti-oxidation properties are required. They would typically be used in high-pressure hydraulic systems, machine tools, presses, compressors, pumps, gear sets, and centralized bearing lubrication systems in industrial plants and at mining and woodlands sites.		

Section 2. Composition and Information on Ingredients

			Exposure Limits (ACGIH)		
Name	CAS #	% (V/V)	TLV-TWA (8 h)	STEL	CEILING
1) Severely hydrotreated hydrocarbon oil and additives	Mixture	100	5 mg/m ³ (oil mist)	10 mg/m ³ (oil mist)	Not established
Manufacturer	Not applicable				
Recommendation	Other Exposure Limits Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	Non irritating to slight transient irritation to skin and eyes, but no permanent damage. Relatively non-toxic via ingestion. This product has a low vapour pressure and is not expected to present an inhalation exposure at ambient conditions. Upon heating to high temperatures, or mechanical actions which may produce vapours or mists, inhalation of product may cause irritation of the breathing passages. For more information, refer to Section 11.
--------------------------	--

Section 4. First Aid Measures

Eye Contact	IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention.
Skin Contact	Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. Seek medical attention.
Inhalation	Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention.
Ingestion	DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	May be combustible at high temperature.	Flammable Limits	Not available.
Flash Points	OPEN CUP: $\geq 196^{\circ}\text{C}$ (384.8°F) (Cleveland)	Auto-Ignition Temperature	Not available.
Fire Hazards in Presence of Various Substances	Low fire hazard. This material must be heated before ignition will occur.	Explosion Hazards in Presence of Various Substances	Containers may explode in heat of fire. Do not cut, weld, heat, drill or pressurize empty container.
Products of Combustion	Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), sulphur oxides (SO _x), smoke and irritating vapours as products of incomplete combustion.		

Fire Fighting Media and Instructions	NAERG96, GUIDE 171, Substances (low to moderate hazard). If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (0.5 mile) in all directions; also, consider initial evacuation for 800 meters (0.5 mile) in all directions. Shut off fuel to fire if it is possible to do so without hazard. If this is impossible, withdraw from area and let fire burn out under controlled conditions. Withdraw immediately in case of rising sound from venting safety device or any discolouration of tank due to fire. Cool containing vessels with water spray in order to prevent pressure build-up, autoignition or explosion. SMALL FIRE: use DRY chemicals, foam, water spray or CO ₂ . LARGE FIRE: use water spray, fog or foam. For small outdoor fires, portable fire extinguishers may be used, and self contained breathing apparatus (SCBA) may not be required. For all indoor fires and any significant outdoor fires, SCBA is required. Respiratory and eye protection are required for fire fighting personnel.
---	---

Section 6. Accidental Release Measures

Material Release or Spill	NAERG96, GUIDE 171, Substances (low to moderate hazard). ELIMINATE ALL IGNITION SOURCES. Avoid contact. Stop leak if without risk. Contain spill. Absorb with inert absorbents, dry clay, or diatomaceous earth. Avoid inhaling dust of diatomaceous earth for it may contain silica in very fine particle size, making this a potential respiratory hazard. Place used absorbent in closed metal containers for later disposal or burn absorbent in a suitable combustion chamber. DO NOT FLUSH TO SEWERS, STREAMS OR OTHER BODIES OF WATER. Check with applicable jurisdiction for specific disposal requirements of spilled material and empty containers. Notify the appropriate authorities immediately.
----------------------------------	---

Section 7. Handling and Storage

Handling	Avoid inhalation and skin contact especially when handling used oil. Keep away from sources of ignition. DO NOT reuse empty containers without commercial cleaning or reconditioning. Practice good personal hygiene. Wash hands after handling and before eating. Launder work clothes frequently. Discard saturated leather goods.
Storage	Store in tightly closed containers in cool, dry, isolated, well-ventilated area, and away from incompatibles.

Section 8. Exposure Controls/Personal Protection

Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection -	The selection of personal protective equipment varies, depending upon conditions of use.
Eyes	Eye protection (i.e., safety glasses, safety goggles and/or face shield) should be determined based on conditions of use. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered.
Body	Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn.
Respiratory	Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation.
Hands	Wear appropriate chemically protective gloves. When handling hot product ensure gloves are heat resistant and insulated.
Feet	Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Viscous liquid	Viscosity	32: 32.0 cSt @ 40°C, 5.35 cSt @ 100°C, VI=99 46: 46.0 cSt @ 40°C, 6.74 cSt @ 100°C, VI=99 68: 68.0 cSt @ 40°C, 8.69 cSt @ 100°C, VI=99
Colour	Pale, Light green.	Pour Point	32: -36°C 46: -33°C 68: -30°C
Odour	Hydrocarbon.	Softening Point	Not applicable.
Odour Threshold	Not available.	Dropping Point	Not applicable.
Boiling Point	Not available.	Penetration	Not applicable.
Density	0.8693 to 0.8740 kg/L @ 15°C (59°F).	Oil / Water Dist. Coefficient	Not available.
Vapour Density	Not available.	Ionicity (in water)	Not available
Vapour Pressure	Negligible at ambient temperature and pressure.	Dispersion Properties	Not available.
Volatility	Non-volatile.	Solubility	Insoluble in water.

Section 10. Stability and Reactivity

Corrosivity	Copper corrosion, 3h, 100°C (ASTM D0130): 1a		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents and acids.	Decomposition Products	May release COx, SOx, H2S, POx, CaOx, ZnOx, methacrylate monomers, alkyl mercaptans, aldehydes, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation and ingestion.		
Acute Lethality	Based on toxicity of components. Acute oral toxicity (LD50): >5000 mg/kg (rat). Acute dermal toxicity (LD50): >2000 mg/kg (rabbit).		
Chronic or Other Toxic Effects			
Dermal Route:	Prolonged or repeated contact may cause skin irritation characterized by dermatitis or oil acne.		
Inhalation Route:	Negligible breathing hazard at normal temperatures (up to 38°C) or recommended blending temperatures. Elevated temperatures or mechanical action may form vapours, mists or fumes. Inhalation of oil mists or vapours from hot oil may cause irritation of the upper respiratory tract.		
Oral Route:	Low toxicity; has laxative effect.		
Eye Irritation/Inflammation:	Repeated or prolonged contact may cause transient irritation, but no permanent damage.		
Immunotoxicity:	Not available.		
Skin Sensitization:	This product is not expected to be a skin sensitizer, based on the available data and the known hazards of the components.		
Respiratory Tract Sensitization:	This product is not expected to be a respiratory tract sensitizer, based on the available data and the known hazards of the components.		
Mutagenic:	Based on actual test results of base oils and results of similar products, severely hydrotreated base oils give negative results when tested for: (a) Salmonella Typhimurium TA98 using the Modified Ames Assay for Petroleum Product; (b) Salmonella-Escherichia coli/Mammalian-Microsome Reverse Mutation Assay (Ames test) with a Confirmatory Assay; (c) Structural Chromosomal Aberrations in Chinese Hamster Ovary (CHO) Cells.		
Reproductive Toxicity:	This product is not expected to be a reproductive hazard, based on the available data and the known hazards of the components.		
Teratogenicity/Embryotoxicity:	This product is not expected to be a teratogen or an embryotoxin, based on the available data and the known hazards of the components.		
Carcinogenicity (ACGIH):	This product is not known to contain any chemicals at reportable quantities that are listed as A1 or A2 carcinogens by ACGIH.		
Carcinogenicity (IARC):	This product is not known to contain any chemicals at reportable quantities that are listed as group 1, 2A or 2B carcinogens by IARC.		
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.		
Carcinogenicity (IRIS):	Not available.		
Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.		
Other Considerations	No additional remark.		

Section 12. Ecological Information




Environmental Fate	Not available	Persistence/ Bioaccumulation Potential	Not available
BOD5 and COD	Not available.	Products of Biodegradation	Not available.
Additional Remarks	No additional remark.		

Section 13. Disposal Considerations

Waste Disposal	Spent/used/waste oil may meet the requirements of a hazardous waste. Consult your local or regional authorities. Preferred waste management priorities are: (1) recycle or reprocess; (2) incineration with energy recovery; (3) disposal at licensed waste disposal facility. Ensure that disposal or reprocessing is in compliance with government requirements and local disposal regulations.
-----------------------	---



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
	Not controlled		

Section 1. Chemical Product and Company Identification

Product Name	PETRO-CANADA SUPREME 5W-30, 10W-30, 10W-40, 20W-50 MOTOR OIL	Code	410-344, MOSP53 410-341, MOSP13 410-342, MOSP14 410-343, MOSP25
Synonym	Not available.	Validated on	5/23/2003.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	Supreme is designed for the lubrication of all gasoline, propane and CNG engines where the manufacturer recommends the use of API SL quality oils. SAE 5W-30 and 10W-30 grades also meet the requirements of ILSAC GF-3.		

Section 2. Composition and Information on Ingredients

			Exposure Limits (ACGIH)		
Name	CAS #	% (W/W)	TLV-TWA(8 h)	STEL	CEILING
1) Mixture of severely hydrotreated and hydrocracked base oil (petroleum) and other proprietary, non-hazardous additives.	Mixture	100	5 mg/m ³ (oil mist)	10 mg/m ³ (oil mist)	Not established
Manufacturer Recommendation	Not applicable				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification

Potential Health Effects	Non irritating to slight transient irritation to skin and eyes, but no permanent damage. Relatively non-toxic via ingestion. This product has a low vapour pressure and is not expected to present an inhalation exposure at ambient conditions. Upon heating to high temperatures, or mechanical actions which may produce vapours or mists, inhalation of product may cause irritation of the breathing passages. For more information, refer to Section 11.
--------------------------	--

Section 4. First Aid Measures

Eye Contact	IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention.
Skin Contact	Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. Seek medical attention.
Inhalation	Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention.
Ingestion	DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	May be combustible at high temperature.	Flammable Limits	Not available.
Flash Points	OPEN CUP: $\geq 225^{\circ}\text{C}$ (437°F) (Cleveland)	Auto-ignition Temperature	Fire Point: $\geq 245^{\circ}\text{C}$ (473°F)
Fire Hazards in Presence of Various Substances	Low fire hazard. This material must be heated before ignition will occur.	Explosion Hazards in Presence of Various Substances	Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire.
Products of Combustion	Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), sulphur oxides (SO _x), smoke and irritating vapours as products of incomplete combustion.		

**Fire Fighting
Media and
Instructions**

NAERG96, GUIDE 171, Substances (low to moderate hazard). If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (0.5 mile) in all directions; also, consider initial evacuation for 800 meters (0.5 mile) in all directions. Shut off fuel to fire if it is possible to do so without hazard. If this is impossible, withdraw from area and let fire burn out under controlled conditions. Withdraw immediately in case of rising sound from venting safety device or any discolouration of tank due to fire. Cool containing vessels with water spray in order to prevent pressure build-up, autoignition or explosion. SMALL FIRE: use DRY chemicals, foam, water spray or CO₂. LARGE FIRE: use water spray, fog or foam. For small outdoor fires, portable fire extinguishers may be used, and self contained breathing apparatus (SCBA) may not be required. For all indoor fires and any significant outdoor fires, SCBA is required. Respiratory and eye protection are required for fire fighting personnel.

Section 6. Accidental Release Measures
**Material Release
or Spill**

Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. Extinguish all ignition sources. Stop leak if safe to do so. Dike spilled material. Use appropriate inert absorbent material to absorb spilled product. Collect used absorbent for later disposal. Avoid contact with spilled material. Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Notify appropriate authorities immediately.

Section 7. Handling and Storage
Handling

Avoid contact with any sources of ignition, flames, heat, and sparks. Avoid skin contact. Avoid eye contact. Avoid inhalation of product vapours or mists. Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product. Properly dispose of contaminated leather articles including shoes that cannot be decontaminated.

Storage

Store in dry, cool, well-ventilated area. Keep container tightly closed. Store away from incompatible and reactive materials (See section 5 and 10).

Section 8. Exposure Controls/Personal Protection
Engineering Controls

For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.

Personal Protection - The selection of personal protective equipment varies, depending upon conditions of use.

Eyes Eye protection (i.e., safety glasses, safety goggles and/or face shield) should be determined based on conditions of use. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered.

Body Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn.

Respiratory Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation.

Hands Wear appropriate chemically protective gloves. When handling hot product ensure gloves are heat resistant and insulated.

Feet Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Viscous liquid.	Viscosity	5W-30: 61.8 cSt @ 40°C (104°F) 10W-30: 65.6 cSt @ 40°C (104°F) 10W-40: 92.1 cSt @ 40°C (104°F) 20W-50: 167 cSt @ 40°C (104°F)
Colour	Light amber.	Pour Point	5W-30: -42°C (-44°F) 10W-30: -36°C (-33°F) 10W-40: -33°C (-27°F) 20W-50: -24°C (-11°F)
Odour	Mild petroleum oil like.	Softening Point	Not applicable.
Odour Threshold	Not available.	Dropping Point	Not applicable.
Boiling Point	Not available.	Penetration	Not applicable.
Density	0.8575 - 0.8749 kg/L @ 15°C (59°F).	Oil / Water Dist. Coefficient	Not available.
Vapour Density	Not available.	Ionicity (in water)	Not available
Vapour Pressure	Negligible at ambient temperature and pressure.	Dispersion Properties	Not available
Volatility	Non-volatile	Solubility	Insoluble in water.

Section 10. Stability and Reactivity

Corrosivity	Not available.		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents.	Decomposition Products	May release COx, H2S, methacrylate monomers, amines, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation, and ingestion.
Acute Lethality	Based on toxicity of components. Acute oral toxicity (LD50): >5000 mg/kg (rat). Acute dermal toxicity (LD50): >2000 mg/kg (rabbit). Acute inhalation toxicity (LC50): >2500 mg/m ³ /4h (rat).
Chronic or Other Toxic Effects	
Dermal Route:	Prolonged or repeated contact may cause skin irritation characterized by dermatitis or oil acne.
Inhalation Route:	Negligible breathing hazard at normal temperatures (up to 38°C) or recommended blending temperatures. Elevated temperatures or mechanical action may form vapours, mists or fumes. Inhalation of oil mists or vapours from hot oil may cause irritation of the upper respiratory tract.
Oral Route:	Low toxicity; has laxative effect.
Eye Irritation/Inflammation:	Repeated or prolonged contact may cause transient irritation, but no permanent damage.
Immunotoxicity:	Not available.
Skin Sensitization:	This product is not expected to be a skin sensitizer, based on the available data and the known hazards of the components.
Respiratory Tract Sensitization:	This product is not expected to be a respiratory tract sensitizer, based on the available data and the known hazards of the components.
Mutagenic:	Based on actual test results of base oils and results of similar products, severely hydrotreated base oils give negative results when tested for: (a) Salmonella Typhimurium TA98 using the Modified Ames Assay for Petroleum Product; (b) Salmonella-Escherichia coli/Mammalian-Microsome Reverse Mutation Assay (Ames test) with a Confirmatory Assay; (c) Structural Chromosomal Aberrations in Chinese Hamster Ovary (CHO) Cells.
Reproductive Toxicity:	This product is not expected to be a reproductive hazard, based on the available data and the known hazards of the components.
Teratogenicity/Embryotoxicity:	This product is not expected to be a teratogen or an embryotoxin, based on the available data and the known hazards of the components.
Carcinogenicity (ACGIH):	This product is not known to contain any chemicals at reportable quantities that are listed as A1 or A2 carcinogens by ACGIH.
Carcinogenicity (IARC):	This product is not known to contain any chemicals at reportable quantities that are listed as group 1, 2A or 2B carcinogens by IARC.
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.
Carcinogenicity (IRIS):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by IRIS.
Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.
Other Considerations	No additional remark.

Section 12. Ecological Information

Environmental Fate	Not available	Persistence/Bioaccumulation Potential	Not available
BOD5 and COD	Not available.	Products of Biodegradation	Not available.
Additional Remarks	No additional remark.		

Section 13. Disposal Considerations

Waste Disposal Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations.

Section 14. Transport Information

TDG Classification	Not controlled under TDG (Canada).	Special Provisions for Transport	Not applicable.
---------------------------	------------------------------------	---	-----------------

Section 15. Regulatory Information

Other Regulations This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).

All components of this formulation are listed on the US EPA-TSCA Inventory.

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.

Please contact Product Safety for more information.

DSD/DPD (Europe)	Not evaluated.	HCS (U.S.A.)	Not controlled under the HCS (United States).
-------------------------	----------------	---------------------	---

ADR (Europe) (Pictograms) NOT EVALUATED FOR EUROPEAN TRANSPORT
NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN

DOT (U.S.A) (Pictograms)



HMIS (U.S.A.)

Health Hazard	1
Fire Hazard	1
Reactivity	0
Personal Protection	B

NFPA (U.S.A.)

Health



Fire Hazard

Reactivity

Specific hazard

Rating

0	Insignificant
1	Slight
2	Moderate
3	High
4	Extreme

Section 16. Other Information

References Available upon request.
* Marque de commerce de Petro-Canada - Trademark

Glossary

ACGIH - American Conference of Governmental Industrial Hygienists
ADR - Agreement on Dangerous goods by Road (Europe)
ASTM - American Society for Testing and Materials ()
BOD5 - Biological Oxygen Demand in 5 days
CAN/CGA B149.2 Propane Installation Code
CAS - Chemical Abstract Services
CEPA - Canadian Environmental Protection Act
CERCLA - Comprehensive Environmental Response, Compensation and Liability Act
CFR - Code of Federal Regulations
CHIP - Chemicals Hazard Information and Packaging Approved Supply List
COD5 - Chemical Oxygen Demand in 5 days
CPR - Controlled Products Regulations
DOT - Department of Transport
DSCL - Dangerous Substances Classification and Labeling (Europe)
DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)
DSL - Domestic Substance List
EEC/EU - European Economic Community/European Union
EINECS - European Inventory of Existing Commercial Chemical Substances
EPCRA - Emergency Planning and Community Right to Know Act
FDA - Food and Drug Administration
FIFRA - Federal Insecticide, Fungicide and Rodenticide Act
HCS - Hazardous Communication System
HMIS - Hazardous Material Information System
IARC - International Agency for Research on Cancer

IRIS - Integrated Risk Information System
LD50/LC50 - Lethal Dose/Concentration kill 50%
LDLo/LCLO - Lowest Published Lethal Dose/Concentration
NAERG'96 - North American Emergency Response Guide Book (1996)
NFPA - National Fire Prevention Association
NIOSH - National Institute for Occupational Safety & Health
NPRI - National Pollutant Release Inventory
NSNR - New Substances Notification Regulations (Canada)
NTP - National Toxicology Program
OSHA - Occupational Safety & Health Administration
PEL - Permissible Exposure Limit
RCRA - Resource Conservation and Recovery Act
SARA - Superfund Amendments and Reorganization Act
SD - Single Dose
STEL - Short Term Exposure Limit (15 minutes)
TDG - Transportation Dangerous Goods (Canada)
TDLo/TCLO - Lowest Published Toxic Dose/Concentration
TLM - Median Tolerance Limit
TLV-TWA - Threshold Limit Value-Time Weighted Average
TSCA - Toxic Substances Control Act
USEPA - United States Environmental Protection Agency
USP - United States Pharmacopoeia
WHMIS - Workplace Hazardous Material Information System

For Copy of MSDS

The Canadian Controlled Products Regulations (CPR) (Under the Hazardous Products Act, part of the WHMIS legislation) only apply to WHMIS Controlled (i.e., hazardous) products. Therefore, the CPR and the 3-year update rule specified therein do not apply to WHMIS Non-Controlled products. Although this is true, customarily Petro-Canada reviews and updates Non-Controlled product MSDS if a customer requests such an update. These Non-Controlled product updates are given a lower priority than Controlled products but are handled as soon as practicable. If you would like to verify if the MSDS you have is the most current, or you require any further information, please contact:

Internet: www.petro-canada.ca

Prepared by Product Safety - JDW on 5/23/2003.

Data entry by Product Safety - JDW.

Lubricants:

Western Canada, telephone: 1-800-661-1199; fax: (780) 464-9564

Ontario & Central Canada, telephone: 1-800-268-5850 and (905) 822-4222; fax: 1-800-201-6285

Quebec & Eastern Canada, telephone: 1-800-576-1686; fax: 800-201-6285

For Product Safety Information: (905) 804-4752

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

PROPANE MSDS

Product Name: Propane

Chemical Name: Propane

Formula: C₃H₈

Chemical Family: Alkane (hydrocarbon)

Use: Various

Synonyms: Dimethylmethane, LP-Gas, Liquified petroleum gas (LPG)

4

1 0

NFPA Fire: 4

HMIS Fire: 4

Acute: No

NFPA Health: 1

HMIS Health: 0

Chronic: No

NFPA Reactivity: 0

HMIS Reactivity: 0

Fire: Yes

NFPA Special Hazard:

Mixture: No

Reactive: No

Sudden Release Pressure: Yes

COMPONENT	CAS No.	PERCENT (BY WT.)		EXPOSURE GUIDELINES	
				OSHA - TWA	ACGIH - STEL
Propane	74-98-6	99.0%	100.0%	1000	Simple Asphyxiant

D50: None. LC50: None.

EMERGENCY OVERVIEW

Warning: Flammable liquid gas under pressure.
Can form explosive mixtures with air.
May cause frostbite.

Potential Health Effects Information

Routes of Exposure

Inhalation: Simple asphyxiant. It should be noted that before suffocation could occur, the lower flammability limit of propane in air would be exceeded; possibly causing both an oxygen-deficient and explosive atmosphere. Exposure to concentrations (> 10%) may cause dizziness. Exposure to atmospheres containing 8-10% or less oxygen will bring about unconsciousness without warning, and so quickly that the individuals cannot help or protect themselves. Lack of sufficient oxygen may cause serious injury or death.

Eye Contact: Contact with liquid or cold vapor can cause freezing of tissue.

Skin Contact: Contact with liquid or cold vapor can cause frostbite.

Chronic Effects: None.

Medical Conditions Aggravated By: None.

Overexposure:

Other Effects Of Overexposure: None.

Carcinogenicity: Propane is not listed by NTP, OSHA or IARC.

Inhalation: Persons suffering from lack of oxygen should be removed to fresh air. If victim is not breathing, administer artificial respiration. If breathing is difficult, administer

oxygen. Obtain prompt medical attention.

Eye: Contact with liquid or cold vapor can cause freezing of tissue. Gently flush eyes with lukewarm water. Obtain medical attention immediately.

Skin: Contact with liquid or cold vapor can cause frostbite. Immediately warm affected area with lukewarm water not to exceed 105°F (40°C).

Ingestion: None.

Notes To Physician: None.

Flash Point: -156F (-104C)

Autoignition: 842F (432C)

Flammable Limits - Lower: 2.2%

Flammable Limits - Upper: 9.5%

Extinguishing Media: CO₂, dry chemical, water spray or fog for surrounding area. Do not extinguish until propane source is shut off.

Fire Fighting Instructions: Evacuate all personnel from danger area. Immediately cool container with water spray from maximum distance, taking care not to extinguish flames. If flames are accidentally extinguished, explosive re-ignition may occur. Stop flow of gas if without risk while continuing cooling water spray.

Fire And Explosion Hazards: Propane is easily ignited. It is heavier than air, therefore, it may collect in low areas or travel along the ground where an ignition source may be present. Pressure in a container can build up due to heat, and it may rupture if pressure relief devices should fail to function.

Hazardous Combustion Products: None known.

Sensitivity To Static Discharge: Possible, container should be grounded.

Sensitivity To Mechanical Impact: None.

Evacuate: Evacuate the immediate area. Eliminate any possible sources of ignition, and provide maximum explosion-proof ventilation. Shut off source of propane, if possible. If leaking from cylinder, or valve, contact your supplier. Never enter a confined space or other area where the concentration is greater than 10% of the lower flammable limit which is 0.22%.

Storage: Specific requirements are listed in NFPA 58. Cylinder storage locations should be well-protected, well-ventilated, dry, and separated from combustible materials. Cylinders should never knowingly be allowed to reach a temperature exceeding 125°F (52°C). Cylinders of propane should be separated from oxygen cylinders or other oxidizers by a minimum distance of 20 ft., or by a barrier of non-combustible material at least 5 ft. high having a fire resistance rating of at least ½ hour. Full and empty cylinders should be segregated. Use a first-in, first-out inventory system to prevent full containers from being stored for long periods of time.

Cylinders should be stored upright with valve protection cap in place and firmly

secured to prevent falling or being knocked over. Protect cylinders from physical damage; do not drag, roll, slide or drop. Use a suitable hand truck for cylinder movement. Post "No Smoking or Open Flames" signs in the storage areas. There should be no sources of ignition. All electrical equipment should be explosion proof in the storage and use areas. Storage areas must meet national electric codes for class 1 hazardous areas.

Handling: Propane is heavier than air and may collect in low areas that are without proper ventilation. Leak check system with leak detection solution, never with flame. If user experiences difficulty operating cylinder valve, discontinue use and contact supplier. Never insert an object (e.g., wrench, screwdriver, pry bar, etc.) into valve cap openings. Doing so may damage valve, causing a leak to occur. Use an adjustable strap wrench to remove over-tight or rusted caps. Non-sparking tools should be used. Never strike an arc on a compressed gas cylinder or make a cylinder a part of an electrical circuit. Electrically bond and ground cylinder when transferring liquid product. For additional precautions in using propane see Section 16 - Other Information.

12.3.1.1 PERSONAL PROTECTION

Engineering Controls

Ventilation: Natural or mechanical to prevent accumulation in worker's breathing zone above exposure limits. (See Section 2).

Personal Protective Equipment (PPE)

Clothing: Cotton Clothing is recommended for use to prevent static electric buildup.

Glasses: Safety glasses are recommended when handling cylinders.

Shoes: Safety shoes are recommended when handling cylinders.

Gloves: Work gloves are recommended when handling cylinders.

Respirator: None required in general use.

Emergency Use: Self-contained breathing apparatus (SCBA) or positive pressure airline with mask are to be used in oxygen-deficient atmosphere. Respirators will not function. Before entering area, you must check for flammable and oxygen deficient atmospheres.

12.3.1.2 PHYSICAL AND CHEMICAL PROPERTIES

Physical State: Gas

Color: Colorless

Odor: Unodorized propane has a slightly sweet odor. If an odorant has been added it will have a strong unpleasant odor.

Molecular Weight: 44.097

Boiling Point: -43.67°F (-42.04°C) @ 1 atm

Specific Gravity: 1.5223 At 70°F (21.1°C) @ 1 atm, Air = 1

Freezing/Melting Point: -305.84°F (-187.69°C) at 1 atm

Vapor Pressure: 109.73 psig, (756.56 kPa) at 70°F (21.2°)

Vapor Density: 0.110 lb./cu ft (1.1.77kg/CuM), At 70°F (21.1°C) @ 1 atm

Water Solubility: .065 Vol./Vol. At 100° F (37.8°C)

Expansion Ratio: 1 to 290 at 70°F (21.1°C)
pH: Not applicable
Odor Threshold: 1800 mg/CuM
Evaporation Rate: Not Applicable - Gas
Coefficient Of Water/Oil Distribution: Information not available

STABILITY AND REACTIVITY

Chemical Stability: Stable
Conditions To Avoid: None.
Incompatibility With Other Materials: Oxidizing agents.
Hazardous Decomposition Products: None.
Hazardous Polymerization: Will not occur

TOXICOLOGICAL INFORMATION

Other Studies Relevant To Material: Propane is nontoxic and is a simple asphyxiant, however it does have slight anesthetic properties and higher concentrations may cause dizziness.
Irritancy Of Material: None.
Reproductive Effects: None.
Teratogenicity: None.
Synergistic Materials: None.
Sensitization To Material: None.
Mutagenicity: None.

ENVIRONMENTAL INFORMATION

ECOTOXICITY: No adverse ecological effects are expected. Propane does not contain any Class I or Class II Ozone depleting chemicals (40 CFR Part 82). Propane is not listed as a marine pollutant by DOT (49 CFR Part 171).

HAZARDous INFORMATION

Waste Disposal Method: Do not attempt to dispose of residual or unused quantities. Return cylinder to supplier.
Residual product within process system may be burned at a controlled rate, if a suitable burning unit (flare stack) is available on site. This shall be done in accordance with federal, state, and local regulations.

HAZARDous INFORMATION

DOT/IMO Shipping Name: Propane
HAZARD CLASS: 2.1 (Flammable gas.)
Identification Number: UN 1978*
PIN: 1978
Product RQ: None.
Shipping Label: Flammable Gas.
Placard (When Required): Flammable gas.
Special Shipping Information: Cylinders should be transported in a secure position, in a well ventilated vehicle. The transportation of compressed gas cylinders in automobiles or in closed-body vehicles can present serious hazards and should be discouraged.
Special Shipping Information *For domestic transportation only: The identification number UN 1075 may be used

in place of the identification number UN 1978. The identification number used must be consistent on package markings, shipping papers, and emergency response information (Special provision 19 from 49 CFR 172.101).

